

B250018



▶ 主要技术特性 (Main Specifications)

- ▶ 适用导线规格 (Applicable wire) : —
- ▶ 适用基板厚度 (Applicable PC board thickness) : 0.8mm~1.6mm
- ▶ 温度范围 (Temperature range) : -25℃~+85℃
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 2A AC, DC
- ▶ 接触电阻 (Contact resistance) : $\leq 0.02 \Omega$
- ▶ 绝缘电阻 (Insulation resistance) : $\geq 1000M \Omega$
- ▶ 耐压 (Withstanding voltage) : 1000V AC/minute

材料及电镀规格 Material and Finish


型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
插座 WAFER	塑胶 HOUSING	PA66 UL94V-0	N/A
	针 PIN	黄铜 Barss	镀锡 Tin-plated

产品尺寸图 Product size chart

 单位: mm 一般公差: ± 0.20

WAFER

B250018-1

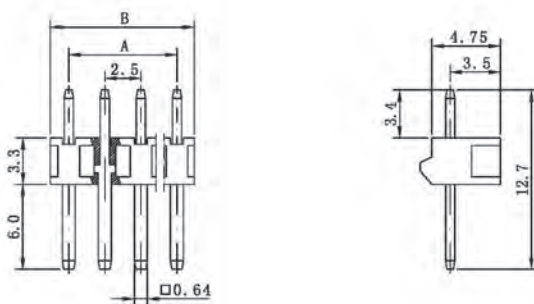

WAFER

极数 Circuits	型号 Type	尺寸 (Dimensions) mm		备注型号 P. S. Type
		A	B	
2	B250018-1-02	2.5	5.0	
3	B250018-1-03	5.0	7.5	
4	B250018-1-04	7.5	10.0	
5	B250018-1-05	10.0	12.5	
6	B250018-1-06	12.5	15.0	
7	B250018-1-07	15.0	17.5	
8	B250018-1-08	17.5	20.0	
9	B250018-1-09	20.0	22.5	
10	B250018-1-10	22.5	25.0	
11	B250018-1-11	25.0	27.5	
15	B250018-1-15	35.0	37.5	